


Package Details - TO-3 50mil

Mechanical Drawing

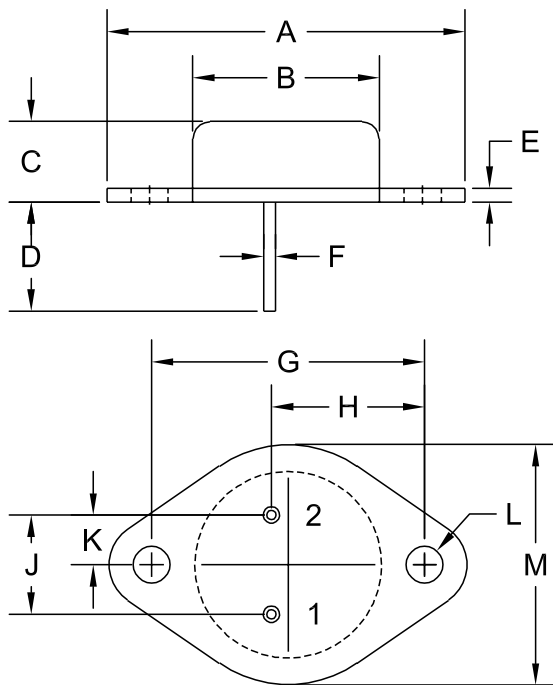

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.516	1.573	38.50	39.96
B (DIA)	0.748	0.875	19.00	22.23
C	0.250	0.450	6.35	11.43
D	0.433	0.516	11.00	13.10
E	0.054	0.065	1.38	1.65
F	0.048	0.051	1.22	1.30
G	1.177	1.197	29.90	30.40
H	0.650	0.681	16.50	17.30
J	0.420	0.440	10.67	11.18
K	0.205	0.225	5.21	5.72
L (DIA)	0.151	0.172	3.84	4.36
M	0.984	1.050	25.00	26.67

TO-3 50 MIL (REV: R0)

Lead Code:

SCR

- 1) GATE
- 2) CATHODE

CASE) ANODE

ZENER (B Suffix)

- 1) CATHODE
- 2) CATHODE

CASE) ANODE

ZENER (RB Suffix)

- 1) ANODE
- 2) ANODE

CASE) CATHODE


R0

Packing Code: C

C = Antistatic coated plastic sleeves
(surface resistivity of $>10^9$ and $<10^{13}$ ohms per square).

Standard Packing Quantity: 20

Sleeve Packing Quantity: 20



TO-3 50mil
Antistatic Sleeve