
Package Details - TO-237

Mechanical Drawing

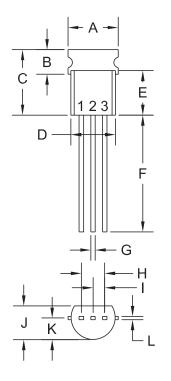

| DIMENSIONS | | | | |
|------------|--------|-------|-------------|------|
| | INCHES | | MILLIMETERS | |
| SYMBOL | MIN | MAX | MIN | MAX |
| Α | 0.160 | 0.215 | 4.06 | 5.46 |
| В | 0.095 | 0.105 | 2.41 | 2.67 |
| С | 0.260 | 0.280 | 6.60 | 7.11 |
| D (DIA) | 0.175 | 0.205 | 4.45 | 5.21 |
| Е | 0.170 | 0.210 | 4.32 | 5.33 |
| F | 0.500 | - | 12.70 | - |
| G | 0.016 | 0.022 | 0.41 | 0.56 |
| Н | 0.100 | | 2.54 | |
| | 0.050 | | 1.27 | |
| J | 0.125 | 0.165 | 3.18 | 4.19 |
| K | 0.080 | 0.105 | 2.03 | 2.67 |
| L | 0.014 | 0.016 | 0.36 | 0.41 |

TO-237 (REV: R1)

Lead Code:

See individual device datasheet

Packing options:

Bulk - Packing Code: D

D = White corrugated box with black conductive coating (surface resistivity of <10⁵ ohms per square).

Bulk Packing Quantity: 2,000

Tape and Reel - Packing Code: I

I = Radial taped and reeled in accordance with EIA-468-B. If required, individual reels placed in antistatic bags (surface resistivity of >10⁹ and <10¹³ ohms per square).

R1

Tape and Reel Packing Quantity: 2,000

