



Package Details

TLM532 Case



Mechanical Drawing

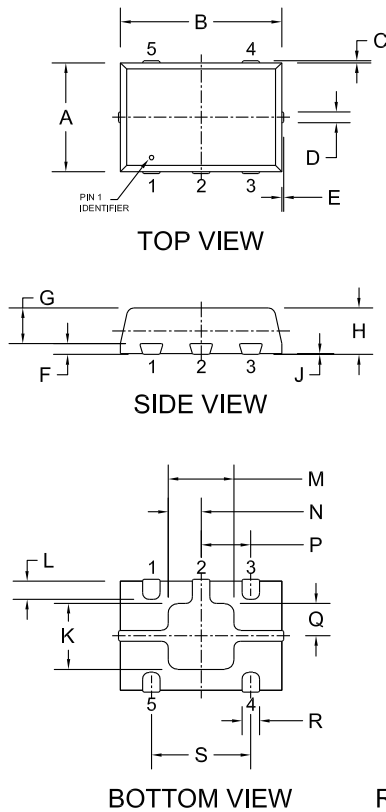

| SYMBOL | INCHES | | MILLIMETERS | |
|--------|--------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.075 | 0.083 | 1.900 | 2.100 |
| B | 0.114 | 0.122 | 2.900 | 3.100 |
| C | --- | 0.005 | --- | 0.125 |
| D | 0.007 | 0.012 | 0.170 | 0.300 |
| E | --- | 0.005 | --- | 0.125 |
| F | 0.006 | 0.010 | 0.150 | 0.250 |
| G | 0.026 | 0.030 | 0.650 | 0.750 |
| H | 0.031 | 0.039 | 0.800 | 1.000 |
| J | 0.000 | 0.002 | 0.000 | 0.050 |
| K | 0.044 | 0.052 | 1.120 | 1.320 |
| L | 0.008 | 0.018 | 0.200 | 0.450 |
| M | 0.044 | 0.052 | 1.120 | 1.320 |
| N | 0.020 | 0.028 | 0.510 | 0.710 |
| P | 0.037 | | 0.950 | |
| Q | 0.020 | 0.028 | 0.510 | 0.710 |
| R | 0.013 | 0.017 | 0.330 | 0.430 |
| S | 0.075 | | 1.900 | |

TLM532 (REV:R0)


Part Marking:

3-4 Character Alpha/Numeric Code

Lead Code:

Reference individual device data sheet.

Mounting Pad Geometry (Dimensions in mm)

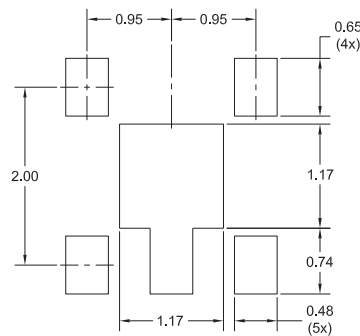

R0


R1 (4-March 2010)

Package Details

TLM532 Case



Tape Dimensions and Orientation (Dimensions in mm)

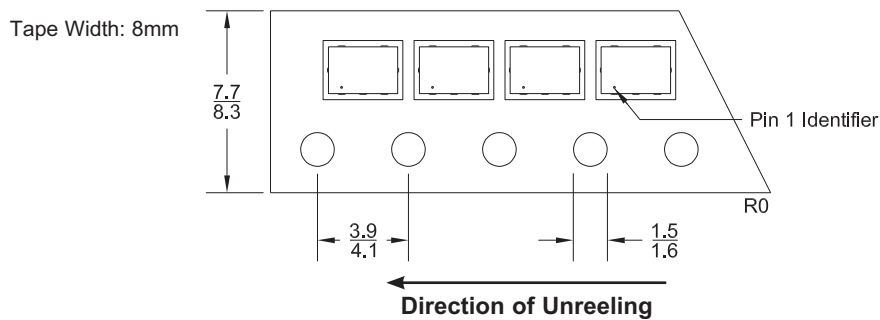

Devices are taped in accordance with Electronic Industries Association Standard EIA-481-1-A

Packaging Base

7" Reel = 3,000 pcs.

Reel Labeling Information

Each reel is labeled with the following information:

Central Part Number, Customer Part Number, Purchase Order Number, Quantity, Lot Number, Date Code, Ship Date and Marking Code.

Reel Packing Information

| Reel Size | Reels per Box (Maximum) | Parts per Box (Maximum) | Box Dimensions | | Shipping Weight (Max.) | |
|-----------|-------------------------|-------------------------|----------------|----------|------------------------|----|
| | | | INCH | CM | LB | KG |
| 7" | 9 | 27,000 | 9x9x5 | 23x23x13 | 4 | 2 |
| | 18 | 54,000 | 9x9x9 | 23x23x23 | 7 | 4 |
| | 40 | 120,000 | 21x9x9 | 53x23x23 | 14 | 7 |
| | 108 | 324,000 | 27x9x17 | 69x23x43 | 39 | 18 |

Ordering Information

- For devices taped and reeled on 7" reels, add TR suffix to part number.
- All SMDs are available in small quantities for prototype and manual placement applications.

R1 (4-March 2010)