

## **APPLICATIONS:**

- PDAs
- Memory Card Ports
- Mobile Phones
- Instrumentation

Central
Semiconductor Corp.

www.centralsemi.com

# DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMATVS3V3 Series devices are Low Leakage, Fast Response TVSs packaged in a space saving SOD-923 surface mount package. These devices are designed to protect sensitive equipment against ESD damage.

# MARKING CODES: CMATVS3V3: E CMATVS5V0: F

## FEATURES:

- Small, 1.0 x 0.6 x 0.4mm, SOD-923 Surface Mount Package
- Low Leakage Current

MAXIMUM RATINGS: (T <sub>A</sub> =25°C)	SYMBOL		UNITS
Peak Power Dissipation (8x20µs)	P <sub>PK</sub>	80	W
Electrical Fast Transient (IEC 61000-4-4) (5x50ns)	EFT	40	А
ESD Voltage (IEC 61000-4-2, Air)	VESD	30	kV
ESD Voltage (IEC 61000-4-2, Contact)	VESD	30	kV
Operating and Storage Junction Temperature	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C

## ELECTRICAL CHARACTERISTICS: (T<sub>A</sub>=25°C) V<sub>F</sub>=0.9V MAX @ I<sub>F</sub>=10mA (for all types)

Maximum Reverse Stand-off Type Voltage VRWM		Minimum Breakdown Voltage V <sub>BR</sub> @ I <sub>T</sub>		Maximum Maximum   Reverse Clamping   Leakage Voltage   Current (8x20µs)   IR @ VRWM VC @ IPP		Typical TLP Clamping Voltage (Note 1) V <sub>CL</sub> @ IPP		Typical Dynamic Resistance (Note 1) RDYN	Typical Junction Capacitance @ 0V Bias CJ	
	v	v	mA	μΑ	v	A	v	А	Ω	pF
CMATVS3V3	3.3	5.0	1.0	2.5	11.7	7.0	6.0	) 11.3	0.5	45
CIMATVS3V3	3.3	5.0	1.0	2.5	11.7	7.0	3.0	5.3		
	E 0	6.0	1.0	10	10.0	7.0	6.0	11.3	- 0.5	40
CMATVS5V0	5.0	5.0 6.2	1.0	1.0	12.3	3 7.0	3.0	5.3		

Note 1: Transmission Line Pulse (TLP) conditions: Z<sub>0</sub>=50Ω, tp=100ns


R7 (25-February 2021)



### CMATVS3V3 CMATVS5V0

\_∀

SURFACE MOUNT SILICON UNI-DIRECTIONAL TRANSIENT VOLTAGE SUPPRESSORS

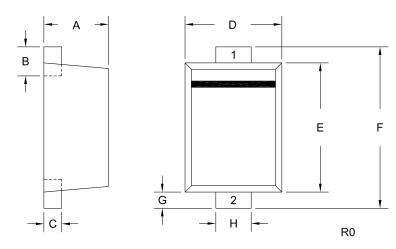

## SOD-923 CASE - MECHANICAL OUTLINE

DIMENSIONS					
	INC	HES	MILLIM	ETERS	
SYMBOL	MIN	MAX	MIN	MAX	
A	0.015	0.016	0.39	0.41	
В	0.004	0.010	0.10	0.26	
С	0.003	0.006	0.08	0.14	
D	0.022	0.026	0.55	0.65	
E	0.030	0.033	0.75	0.85	
F	0.035	0.043	0.90	1.10	
G	0.002	0.006	0.05	0.15	
Н	0.007	0.011	0.17	0.27	
SOD-923 (REV: R0)					

1) Cathode 2) Anode

LEAD CODE:

MARKING CODES: CMATVS3V3: E CMATVS5V0: F


R7 (25-February 2021)

www.centralsemi.com







Reverse Voltage 7.2 V<sub>BR</sub>, Breakdown Voltage (Volts) 7.0 6.8 CMATVS5V0. 6.6 6.4 6.2 сматувзуз I=1.0mA 6.0 <del>|-</del> -25 ò 25 50 75 100 125 T<sub>A</sub>, Ambient Temperature (°C)

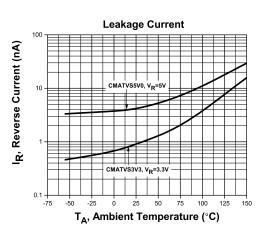

# TYPICAL ELECTRICAL CHARACTERISTICS

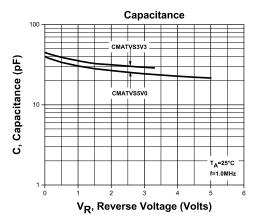

Clamping Voltage (V<sub>C</sub>) vs Peak Pulse Current (I<sub>PP</sub>)

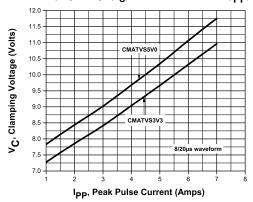


www.centralsemi.com


R7 (25-February 2021)







TYPICAL ELECTRICAL CHARACTERISTICS

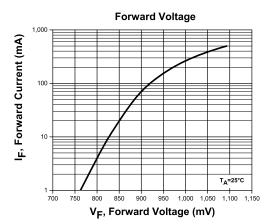

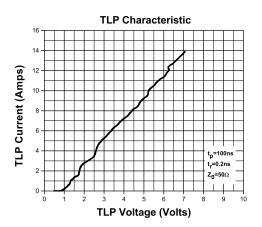

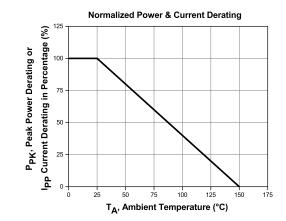

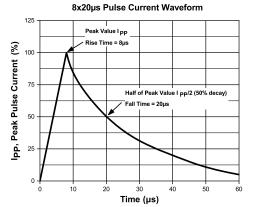

R7 (25-February 2021)

www.centralsemi.com

# **OUTSTANDING SUPPORT AND SUPERIOR SERVICES**

#### **PRODUCT SUPPORT**

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- · Consolidated shipping options

### **DESIGNER SUPPORT/SERVICES**

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities

ss your design challenges.

· Custom product packing

- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- · Application and design sample kits

Custom bar coding for shipments

Custom product and package development

## **REQUESTING PRODUCT PLATING**

- 1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
- If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

# CONTACT US

## **Corporate Headquarters & Customer Support Team**

Central Semiconductor Corp. 145 Adams Avenue Hauppauge, NY 11788 USA Main Tel: (631) 435-1110 Main Fax: (631) 435-1824 Support Team Fax: (631) 435-3388 www.centralsemi.com

Worldwide Field Representatives: www.centralsemi.com/wwreps

Worldwide Distributors: www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: <u>www.centralsemi.com/terms</u>

